


FEATURES & BENEFITS

- Can control loads, as in geysers/boilers, pumps, under floor heating etc.
- Controlled by Single Phase meters over PLC via preset time schedules OR via command from Head End System
- Up to 8 time schedules
- DIN Rail mount
- Configurable load limiting between 1A and 60A
- Overload control
- Read and set parameter through optical communication or via PLC

TECHNICAL SPECIFICATIONS

ITEM	SPECIFICATIONS
Load Management Current	1 ~ 60A
Voltage	230V
Frequency	50Hz
Power Consumption	<10VA,2W
Continuous Work Time	≥10year
Meter dimensions	L*W*H=125*55*130
Operation temperature	-10°C-45°C
Limited operation temperature	-25°C-55°C
Transport and storage temperature	-25°C-70°C
Relatively humidity	30%-95%, without coagulate frost

SCHEMATIC

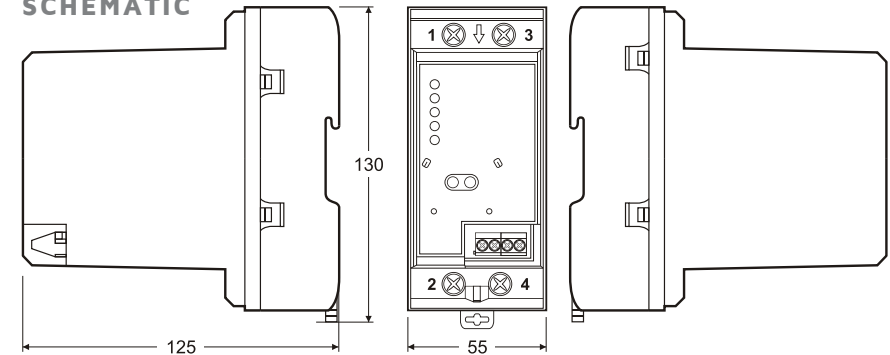

CONNECTION DIAGRAM

